


Straight Shank Reamers

DIN 212-B



Tolerance H4 0.01mm increments
HSS E M35 (5%) Cob

D	L	l1	l2	d2	Z	Price £
0.70 – 0.79	33	7	10	D-0.05	4	17.10
0.80 – 1.05	38	12	14		4	14.70
1.06 – 1.44	40	15	24		6	14.00
1.45 – 1.79	43	18	26		6	13.75
1.80 – 2.36	49	18	26		6	12.30
2.37 – 3.75	57	20	38		6	11.40
3.76 – 4.25	75	24	51	4	6	11.60
4.26 – 4.75	80	25	55	4.5	6	12.00
4.76 – 5.30	86	26	60	5	6	12.35
5.31 – 5.80	93	27	66	5.5	6	13.15
5.81 – 6.70	101	28	73	6	6	13.35
6.71 – 7.55	109	31	80	7	6	14.80
7.56 – 8.55	117	33	86	8	6	15.30
8.56 – 9.55	125	36	91	9	6	16.15
9.56 – 11.30	133	38	99	10	6	18.85
11.31 – 12.50	151	44	106	12	6	24.70
12.51 – 13.20	151	44	106	12	8	24.70

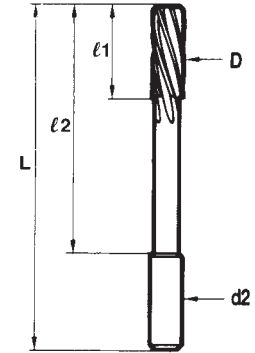

Straight Shank Stub Reamers

DIN 8089

Tolerance H4 0.01mm increments
HSS E M35 (5%) Cob

D	l1	l2	d	Price £
3.75 – 4.30	56	20	3.55	11.80
4.31 – 5.3	63	22	4.0	12.30
5.31 – 6.3	63	22	5.0	13.25
6.31 – 6.80	63	22	5.0	13.50
6.81 – 7.30	71	25	6.3	14.60
7.31 – 8.30	71	25	6.3	15.80
8.31 – 8.80	71	25	6.3	16.10
8.81 – 9.30	71	25	8.0	16.40
9.31 – 9.80	71	25	8.0	16.95
9.81 – 10.30	71	25	8.0	17.40
10.31 – 10.80	71	25	8.0	18.40
10.81 – 11.30	80	28	10.0	19.60
11.31 – 11.80	80	28	10.0	20.00
11.81 – 12.30	80	28	10.0	20.50
12.31 – 12.80	80	28	10.0	21.10
12.81 – 13.30	80	28	10.0	21.90

